




## Features

CD60 Motor Start Capacitor, Single Faston Bipolar cable 110V 220V 330V

It applies to A.C. single phase motor, with frequency 50/60Hz, rated voltage 110-330VAC. It can help motors gain high torque with low starting current and make motor start normally. It can also start refrigerators and compressors of air condition, etc.

## Capacitor Drawing

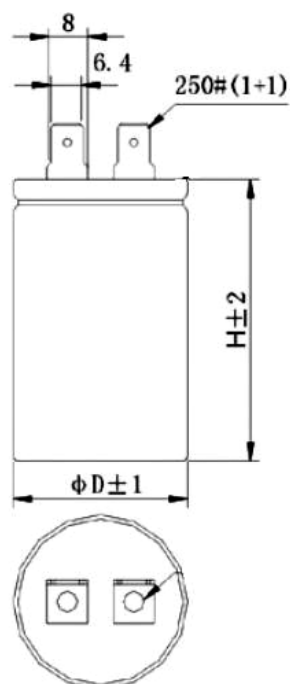


## Specification

Working Temperature Range	-40--+65°C
Rated Voltage Range	110V,150V,165V,220V,250V,275V,300V,330VAC
Rated Capacitance Range	50 - 1000uF
Dissipation Factor	Tan $\leq$ 0.01 (50 Hz)
Rated Tolerance of capacitance	0-+20%
Without Voltage Between Terminal	Apply 1.25 times working voltage, for 2 Seconds,with out break down or explosion
Withstand Voltage Between Terminal and case	2000Vac ,for 10 seconds,without break down or explosion

## Packing and Mark

**CINCO**  
Motor Start Capacitor  
88-108 $\mu$ F 0- +10%  
220 / 250 V.AC  
50/60Hz 25/55/21

     
EN 60252-1

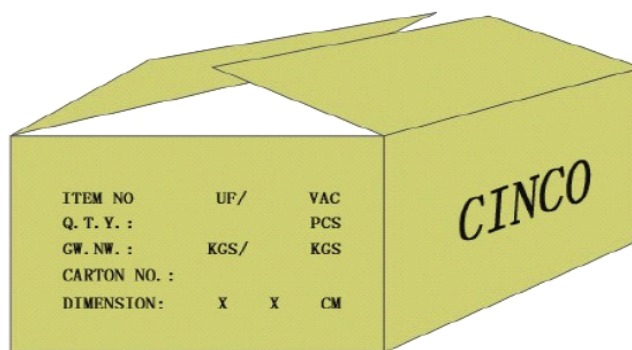

## Dimensions

Capacitance	Rated Voltage 115VAC	Rated Voltage 165VAC	Rated Voltage 200-275VAC	Rated Voltage 330VAC
50uF	34×80	34×80	34×80	34×80
75uF	34×80	34×80	34×80	34×80
100uF	34×80	34×80	42×70	42×70
150uF	34×80	34×80	42×70	42×70
200uF	42×70	34×80	42×70	42×70
250uF	42×70	42×70	42×70	50×100
300uF	42×70	42×70	42×70	50×100
350uF	50×100	42×70	42×70	50×100
400uF	50×100	50×100	50×100	50×100
500uF	50×100	50×100	50×100	50×100
600uF	50×100	50×100	50×100	50×120
700uF	50×120	50×120	50×120	50×120
800uF	50×120	50×120	50×120	50×120
1000uF	50×120	50×120	50×120	50×120

Capacitance	Rated Voltage 115VAC	Rated Voltage 165VAC	Rated Voltage 200-275VAC	Rated Voltage 330VAC
50-100uF	34×80	34×80	34×80	34×80
100-120uF	34×80	34×80	34×80	34×80
120-150uF	34×80	34×80	34×80	34×80
150-200uF	34×80	34×80	42×70	42×70
200-250uF	34×80	34×80	42×70	42×70
250-300uF	42×70	34×80	42×70	42×70
350-400uF	42×70	42×70	42×70	50×100
400-500uF	42×70	42×70	42×70	50×100
500-600uF	50×100	42×70	42×70	50×100
700-800uF	50×100	50×100	50×100	50×100

**Note:**

Special specs are available on request.